



200 Pro V



200 PRO V TEST DATE 10/21/12

Length	20'4"
Beam	94"
Dry Weight (Boat Only)	1,700 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,591 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F115 TXR

Horsepower	115 HP
Displacement	106.2 CID
Dry Weight (Engine)	412 lbs
Gear Ratio	2.15:1
Mounting Height	#2

PROPELLERS

Material/Blades	SS/3
Series	Aluminum Series
Diameter/Pitch	13x19
Yamaha Part #	6E5-45941-00-EL


TEST CONDITIONS

Number of People	2
Air Temperature (Fahrenheit)	64° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1000	4.8	0.6	8.00
1500	6.2	1.0	6.20
2000	7.5	1.4	5.36
2500	10.4	2.0	5.20
3000	16.1	2.6	6.19
3500	21.9	3.3	6.64
4000	26.1	4.0	6.53
4500	30.5	5.8	5.26
5000	33.3	6.7	4.97
5500	37.1	8.3	4.47
5700	40.1	10.4	3.86



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

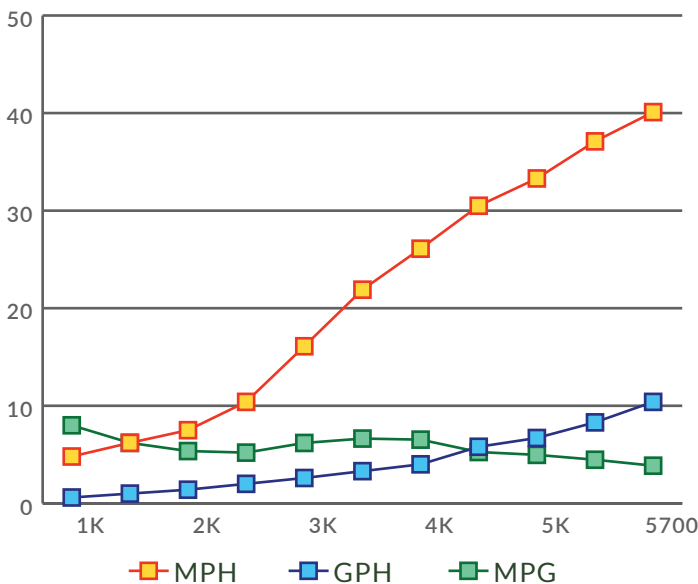



200 Pro V



200 PRO V TEST DATE 9/19/11

Length	20'4"
Beam	94"
Dry Weight (Boat Only)	1700 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2600 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

MERCURY 150 FOUR STROKE

Horsepower	150 HP
Displacement	3.0 L
Dry Weight (Engine)	455 lbs
Gear Ratio	1.92:1
Mounting Height	#2


PROPELLERS

Material/Blades	SS/3
Series	Energia
Diameter/Pitch	14x17
Mercury Part #	48-898994A46

TEST CONDITIONS

Number of People	2
Air Temperature (Fahrenheit)	35° F
Elevation	2,200 ft.
Wind Velocity	0-10 mph

RPM	MPH	GPH	MPG
1000	5	0.9	5.6
2000	8.8	2.2	4.0
3000	21.5	7.0	3.1
3500	25.2	5.4	4.7
4000	30	6.4	4.7
4500	35	8.9	3.9
5000	39.5	11.4	3.5
5500	45.5	13.7	3.3

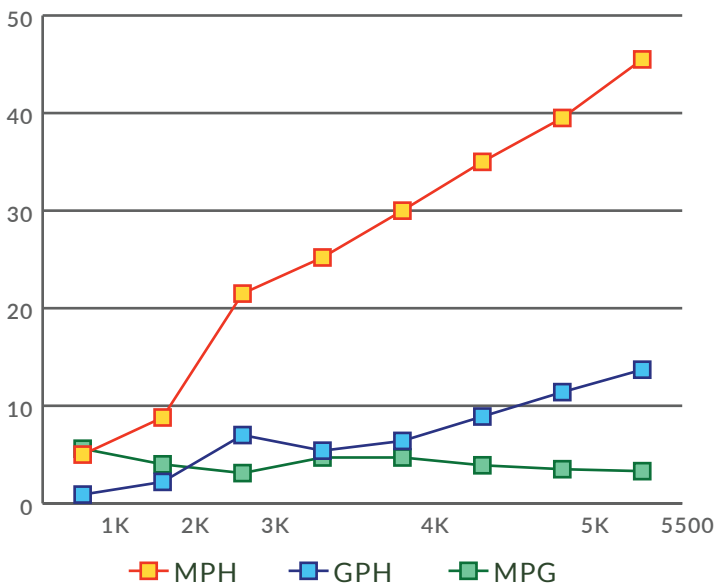

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



200 Pro V ET



200 PRO V ET

TEST DATE 6/13/23

Length	22'8"
Beam	94"
Dry Weight (Boat Only)	1,925 lbs
Maximum HP	200
Fuel Capacity	48
Weight as tested (Approximate)	3,052 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

HONDA BF200DXRA

Horsepower	200 HP
Displacement	219 CID
Dry Weight (Engine)	622 lbs
Gear Ratio	2:1
Mounting Height	#2


PROPELLERS

Material/Blades	SS/3
Series	Solas
Diameter/Pitch	14 3/4x17
Honda Part #	6J9-45976-10-00

TEST CONDITIONS

Number of People	2
Air Temperature (Fahrenheit)	70° F
Elevation	1,300 ft.
Wind Velocity	5-10 mph

RPM	MPH	GPH	MPG
1000	5	0.81	6.17
1500	7	1.4	5
2000	8.5	1.9	4.47
2500	12	2.995	4.01
3000	20	4.6	4.35
3500	24.5	5.6	4.38
4000	30	7.65	3.92
4500	34.5	9.25	3.73
5000	38	12.6	3.02
5500	42	14.95	2.81
6000	45.5	16.95	2.68

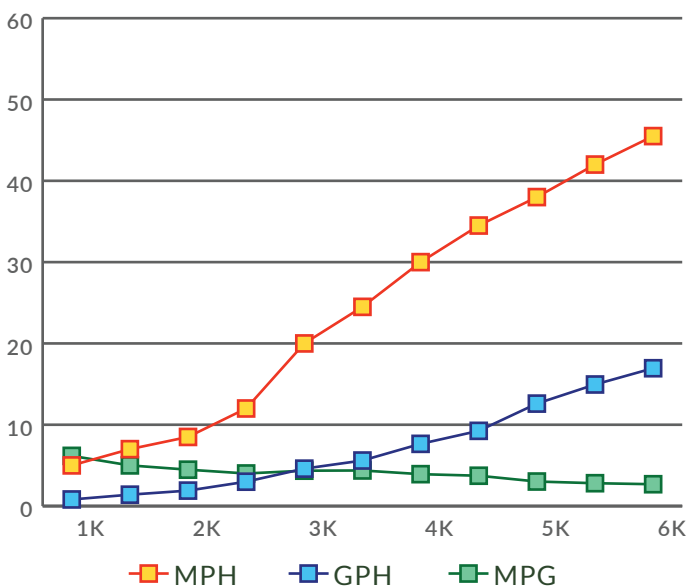

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



200 Pro V ET



200 PRO V ET

TEST DATE 8/28/12

Length	22'8"
Beam	94"
Dry Weight (Boat Only)	1,925 lbs
Maximum HP	200
Fuel Capacity	48
Weight as tested (Approximate)	3,052 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

YAMAHA F200 XA

Horsepower	200 HP
Displacement	158.5 CID
Dry Weight (Engine)	668 lbs
Gear Ratio	1.75:1
Mounting Height	#2


PROPELLERS

Material/Blades	SS/3
Series	Pro Series
Diameter/Pitch	14 1/4x21
Yamaha Part #	6J9-45976-10-00

TEST CONDITIONS

Number of People	2
Air Temperature (Fahrenheit)	70° F
Elevation	1,300 ft.
Wind Velocity	5-10 mph

RPM	MPH	GPH	MPG
1000	4.9	1.1	4.46
1500	7.2	1.8	4.0
2000	9.8	2.8	3.5
2500	15.0	3.6	4.17
3000	21.7	4.3	5.05
3500	29.3	5.7	5.14
4000	34.4	7.3	4.71
4500	40.1	9.9	4.05
5000	44.9	12.6	3.56
5500	49.8	15.1	3.30
5700	53.1	17.1	3.11

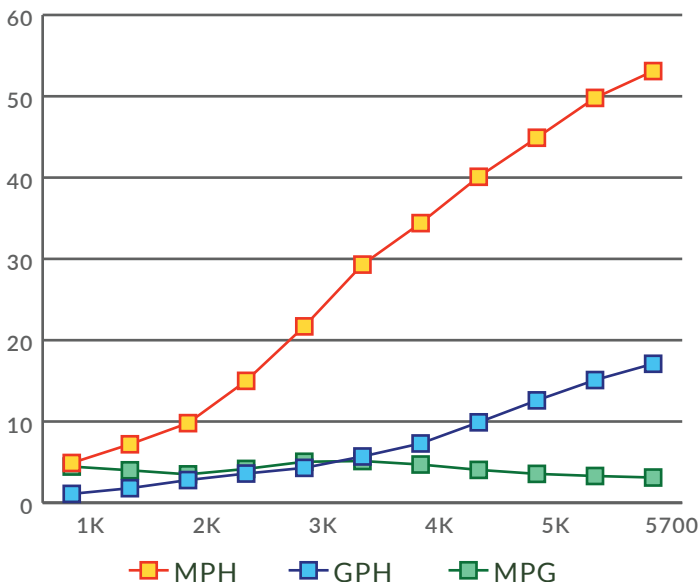

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.