

## 250 Alaskan HT



### HEWESCRAFT 250 ALASKAN HT TEST DATE 6/20/18

Length	25'7"
Beam	102"
Dry Weight (Boat Only)	4,600 lbs
Maximum HP	400
Fuel Capacity	190
Weight as tested (Approximate)	5,625 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### YAMAHA F150XB / LF150XB

Horsepower	Twin 150 HP
Displacement	163 CID
Dry Weight (Engine)	489 lbs
Gear Ratio	2:1
Mounting Height	#2


### PROPELLERS

Material/Blades	SS/3
Series	Painted SS
Diameter/Pitch	14 1/4 x 17
Yamaha Part #	68F-45972-00-00 / 68G-45972-00-00

### TEST CONDITIONS

Number of People	5
Air Temperature (Fahrenheit)	82 ° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1000	5.25	1.40	3.75
1500	6.25	2.40	2.60
2000	8.60	3.90	2.21
2500	10.65	5.80	1.84
3000	16.25	8.40	1.93
3500	22.10	10.60	2.08
4000	27.25	12.40	2.20
4500	32.30	15.50	2.08
5000	36.75	18.60	1.98
5500	40.20	25.20	1.60
6000	45.05	31.20	1.44
6100	45.2	31.4	1.44

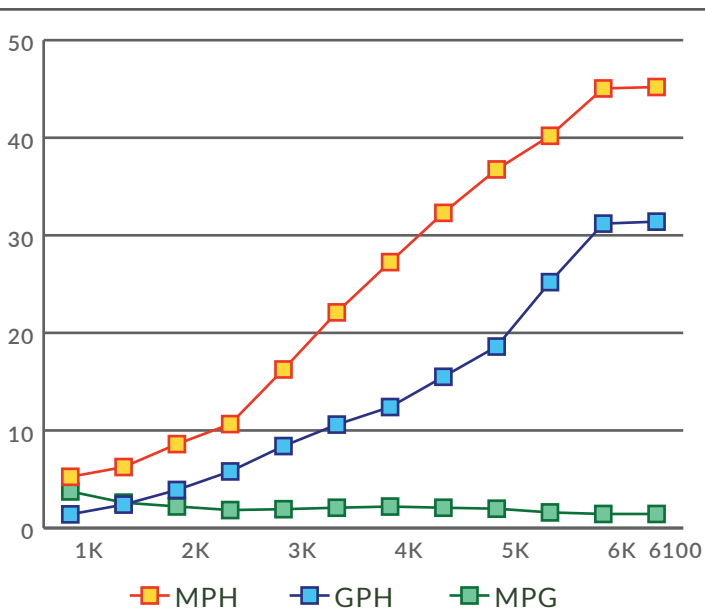

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

# 250 Alaskan HT



**HEWESCRAFT 250 ALASKAN HT TEST DATE 1/16/19**

Length	25'7"
Beam	102"
Dry Weight (Boat Only)	4600 lbs
Maximum HP	450
Fuel Capacity	190
Weight as tested (Approximate)	5,867 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

**SUZUKI 300**

Horsepower	300 HP
Displacement	245.6 CID
Dry Weight (Engine)	660 lbs
Gear Ratio	2.08:1
Mounting Height	#2

**PROPELLERS**

Material/Blades	SS/3
Series	Water Grip
Diameter/Pitch	16x17
Suzuki Part #	990C0-00810-17P


**TEST CONDITIONS**

Number of People	5
Air Temperature (Fahrenheit)	35 ° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1000	4.5	1.0	4.5
1500	6.5	1.7	3.82
2000	8.0	2.7	3.02
2500	9.0	4.4	2.05
3000	11.5	6.3	1.84
3500	15.5	8.0	1.94
4000	23.0	10.2	2.27
4500	28.5	13.6	2.10
5000	34.5	16.3	2.12
5500	38.0	19.0	2.00
6000	41.5	26.0	1.60



**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

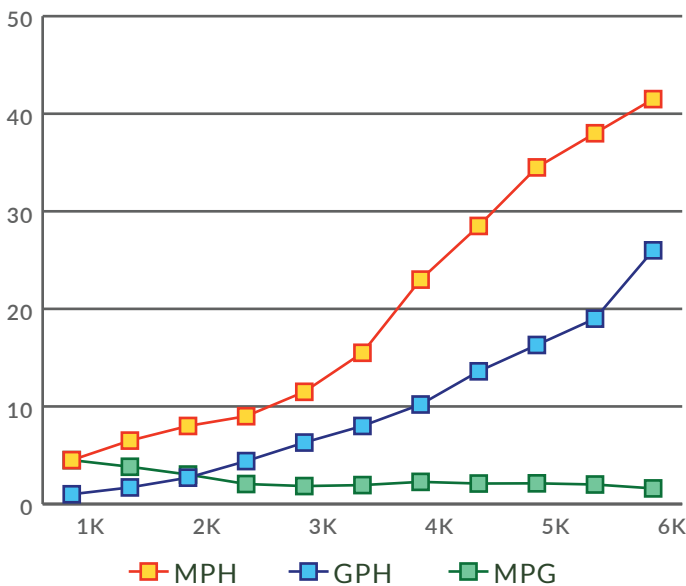

# 250 Alaskan HT



**HEWESCRAFT 250 ALASKAN HT TEST DATE 12/20/18**

Length	27'7"
Beam	102"
Dry Weight (Boat Only)	4,600 lbs
Maximum HP	450
Fuel Capacity	190
Weight as tested (Approximate)	5,867 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

**YAMAHA F425**

Horsepower	425 HP
Displacement	5,559 CC
Dry Weight (Engine)	668 lbs
Gear Ratio	1.79:1
Mounting Height	#2


**PROPELLERS**

Material/Blades	SS/3
Series	XTO
Diameter/Pitch	16 5/8x19
Yamaha Part #	6GR-45974-00-00

**TEST CONDITIONS**

Number of People	5
Air Temperature (Fahrenheit)	35 ° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
500	3.75	1	3.75
1000	7.5	2	3.75
1500	8.5	2.8	3.04
2000	9.5	4.5	2.11
2500	14.5	6.3	2.30
3000	20.25	8.4	2.41
3500	28.5	11.1	2.57
4000	34.5	14.4	2.40
4500	40.0	17.75	2.25
5000	43.5	23.25	1.87
5500	48.0	28.0	1.71
6000	53.0	36.75	1.44

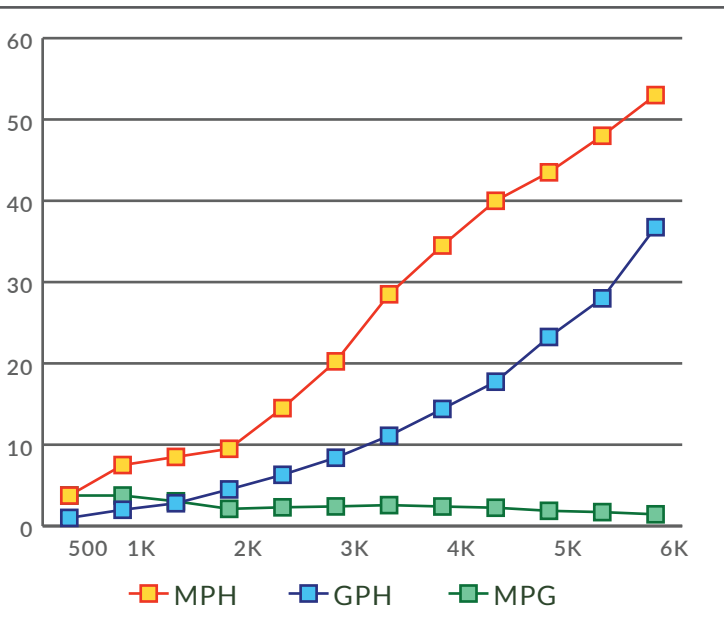

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

## 270 Alaskan HT



### HEWESCRAFT 270 ALASKAN HT TEST DATE 9/16/22

Length	27'7"
Beam	102"
Dry Weight (Boat Only)	5,200lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	6,020 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### MERCURY TWIN 225

Horsepower	225 Twin HP
Displacement	209 CID
Dry Weight (Engine)	475 lbs
Gear Ratio	1.85:1
Mounting Height	#1


### PROPELLERS

Material/Blades	SS/3
Series	SS
Diameter/Pitch	14 3/4x17
Mercury Part #	N/A

### TEST CONDITIONS

Number of People	4
Air Temperature (Fahrenheit)	65 ° F
Elevation	1,260 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1500	8.15	3.0	2.7
2000	10.1	4.9	2.1
2500	14.4	6.1	2.4
3000	19.5	7.7	2.5
3500	26.4	11.0	2.4
4000	32.0	13.5	2.4
4500	37.0	18.1	2.0
5000	40.9	21.4	1.9
5500	45.1	30.7	1.5
6000	49.1	36.7	1.3

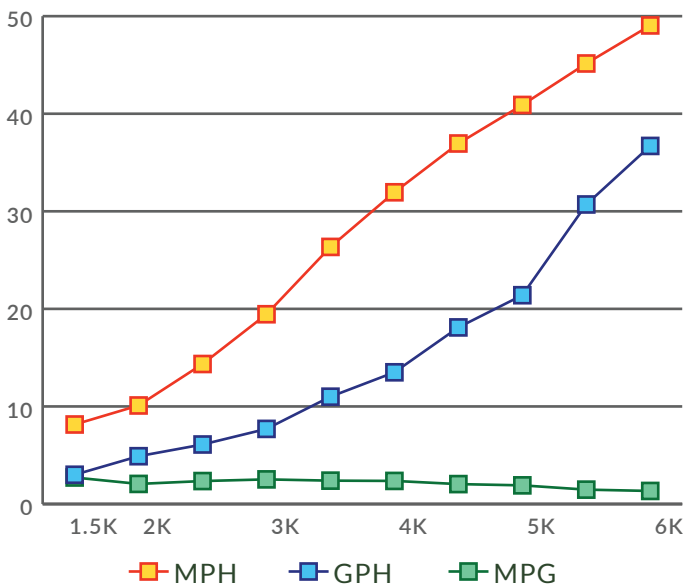

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



## 270 Alaskan HT



### HEWESCRAFT 270 ALASKAN HT TEST DATE 5/19/18

Length	27'7"
Beam	102"
Dry Weight (Boat Only)	5,200lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	6,020 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### YAMAHA F150XB / LF150XB

Horsepower	150 Twin HP
Displacement	163 CID
Dry Weight (Engine)	489 lbs
Gear Ratio	2:1
Mounting Height	#2


### PROPELLERS

Material/Blades	SS/3
Series	Painted SS
Diameter/Pitch	14 1/4x17
Yamaha Part #	68F-45972-00-00 / 68G-45972-00-00

### TEST CONDITIONS

Number of People	4
Air Temperature (Fahrenheit)	52 ° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1000	3	1.3	2.3
1500	6	2.73	2.2
2000	8	3.48	2.3
2500	12	5.22	2.3
3000	16	6.67	2.4
3500	22	9.17	2.4
4000	27	11.25	2.4
4500	31	14.1	2.2
5000	35	19.44	1.8
5500	38	25.33	1.5
6000	42	32.3	1.3

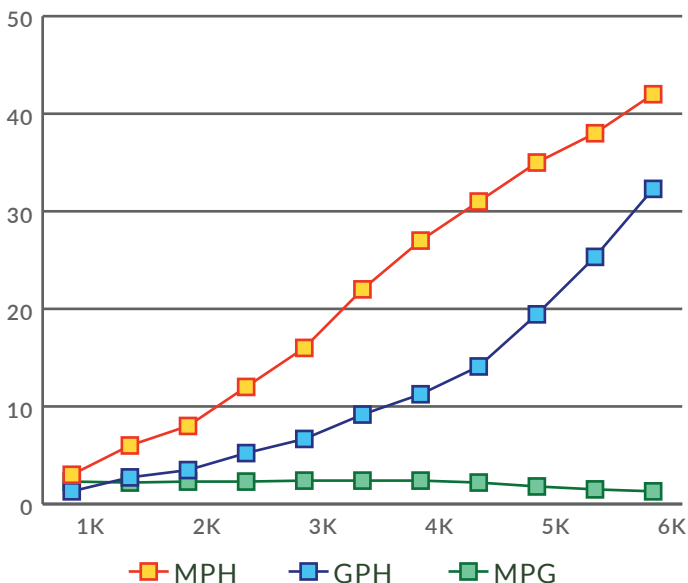

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

## 270 Alaskan HT



### HEWESCRAFT 270 ALASKAN HT TEST DATE 6/12/19

Length	27'7"
Beam	102"
Dry Weight (Boat Only)	5,200lbs
Maximum HP	500
Fuel Capacity	190
Weight as tested (Approximate)	8623 lbs

Note: Test weight may include 1/2 tank of fuel, 1 battery, safety & test Equipment

### YAMAHA F200XCA / 200XCA

Horsepower	200 Twin HP
Displacement	2.8 L
Dry Weight (Engine)	489 lbs
Gear Ratio	1.86:1
Mounting Height	#2


### PROPELLERS

Material/Blades	SS/3
Series	Reliance Series
Diameter/Pitch	14 1/4x15
Yamaha Part #	68F-45972-10-00 / 68G-45972-10-00

### TEST CONDITIONS

Number of People	4
Air Temperature (Fahrenheit)	60° F
Elevation	1,300 ft.
Wind Velocity	0-5 mph

RPM	MPH	GPH	MPG
1000	6	1.6	3.75
1500	7	2.6	2.69
2000	9	4.0	2.25
2500	11	5.7	1.93
3000	15	7.6	1.97
3500	22	9.5	2.32
4000	28	12.4	2.26
4500	32	14.8	2.16
5000	36	18.4	1.96
5500	41	24	1.71
6100	45	35	1.29

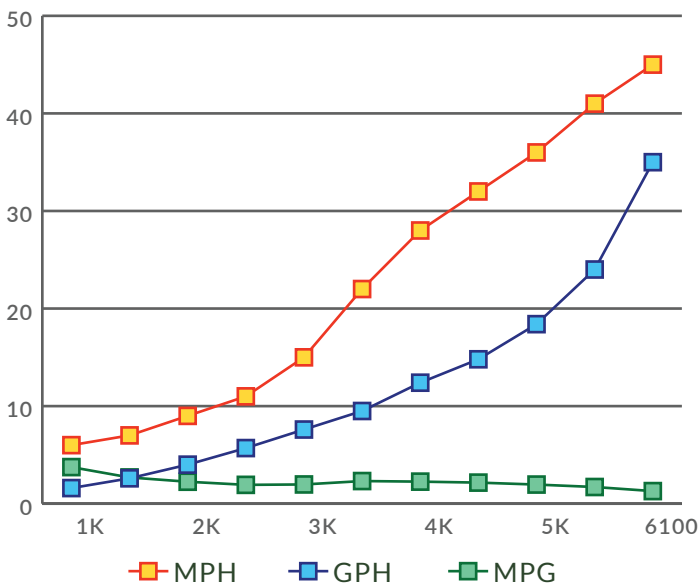

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.