



Performance Bulletin – 220 Ocean Pro ET



RPM	MPH Hewes	GPH	MPG
Idle	3.0	0.40	7.50
1000	5.0	0.80	6.25
1500	7.0	1.60	4.38
2000	9.0	2.80	3.21
2500	16.0	3.80	4.21
3000	22.0	5.10	4.31
3500	28.0	6.60	4.24
4000	32.0	8.50	3.76
4500	36.0	11.30	3.19
5000	39.0	13.70	2.85
5500	43.0	17.60	2.44
WOT 6000	45.0	20.00	2.25

Hewescraft® 220 Ocean Pro ET

Test Date 9/15/16

Length	24'8"
Beam	102"
Dry Weight (Boat only)	3,800 lbs.
Maximum HP	250
Fuel Capacity	100 gallons
Weight as Tested (approx.)	4,351 lbs.

Note: Test weight includes 94 gallons of fuel, 1 battery, safety & test Equipment

Honda BF225

Horsepower	225 HP
Displacement	3.5L V6 VTEC
Dry Weight (engine)	599 lbs.
Gear Ratio	1.86
Mounting Height	#2

Propellers


Material / Blades	SS / 3 Blade
Series	Stainless Steel
Diameter / Pitch	15 x 17

Test Conditions

Number of People	2
Air Temperature	70° F
Elevation	1250 ft
Wind Velocity	0 - 5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Honda reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

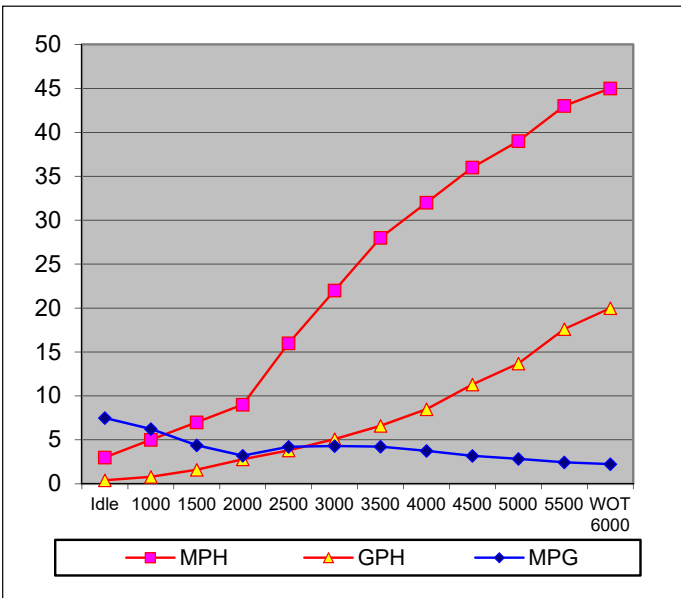

Time to plane: 3.9 Seconds Acceleration 0-20 MPH: -----



Performance Bulletin – 220 Ocean Pro ET HT



Hewescraft® 220 Ocean Pro ET HT

Test Date 10/23/08

Length	24'3"
Beam	102"
Dry Weight (Boat only)	2,600 lbs.
Maximum HP	225
Fuel Capacity	85 gallons
Weight as tested (Approximate)	3,802 lbs.

Note: Test weight includes 1/3 tank of fuel, 1 battery, safety & test Equipment

Yamaha F115TXR

Horsepower	115 HP
Displacement	106.2 cu. in.
Dry Weight (engine)	412 lbs.
Gear Ratio	2.15
Mounting Height	#2

Propellers


Material /Blades	Aluminum / 3 blade
Series	Aluminum
Diameter/Pitch	13 ½ x 15
Yamaha Part #	6E5-45947-00-EL

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	52° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 - 5 mph



RPM	MPH	GPH	MPG
1000	5.4	0.5	9.00
1500	6.2	0.9	6.89
2000	7.5	1.4	5.36
2500	8.6	1.9	4.53
3000	10.2	2.7	3.78
3500	14.0	3.4	4.12
4000	17.9	4.5	3.98
4500	22.3	5.9	3.78
5000	26.0	6.7	3.88
5500	29.5	8.5	3.47
5900	32.5	10.6	3.07

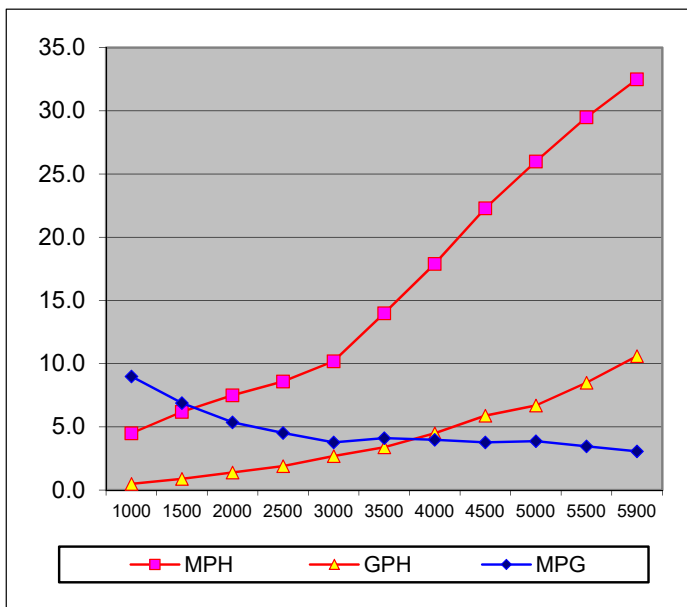

Time to plane: 8.85 Seconds Acceleration 0-30 MPH: N/A Seconds

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 220 Ocean Pro ET HT



Hewescraft® 220 Ocean Pro ET HT

Test Date 10/22/08

Length	24'3"
Beam	102"
Dry Weight (Boat only)	2,600 lbs.
Maximum HP	225
Fuel Capacity	85 gallons
Weight as tested (Approximate)	3,875 lbs.

Note: Test weight includes 3/5 tank of fuel, 1 battery, safety & test Equipment

Yamaha F150TXR

Horsepower	150 HP
Displacement	163 cu. in.
Dry Weight (engine)	475 lbs.
Gear Ratio	2.00
Mounting Height	#2


Propellers

Material / Blades	Aluminum / 3 blade
Series	Aluminum
Diameter / Pitch	14 1/4 x 17
Yamaha Part #	68F-45972-00-00

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	50° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	5 - 10 mph

RPM	MPH	GPH	MPG
1000	5.1	0.7	7.29
1500	6.9	1.2	5.75
2000	8.5	1.9	4.47
2500	10.4	2.7	3.85
3000	14.7	3.9	3.77
3500	20.7	5.2	3.98
4000	26.0	6.8	3.82
4500	30.1	8.6	3.50
5000	34.5	11.2	3.08
5500	38.4	14.4	2.67
5900	41.4	16.0	2.59

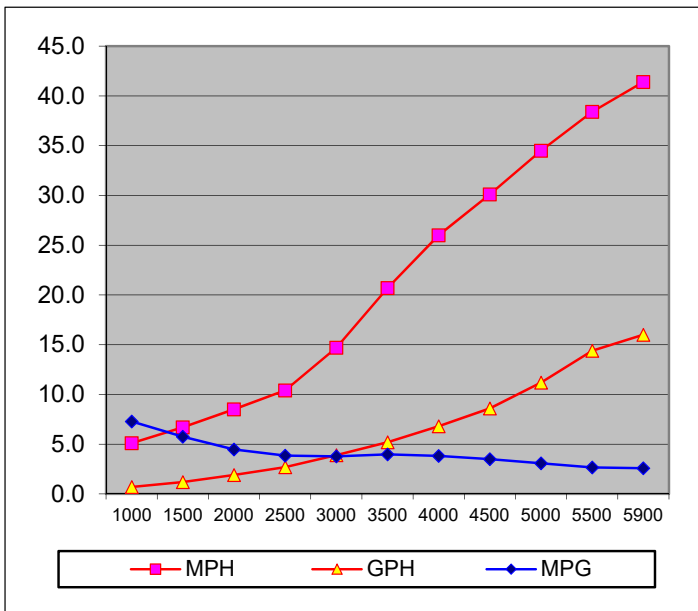

Time to plane: 5.74 Seconds Acceleration 0-30 MPH: N/A Seconds




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 220 Ocean Pro HT



RPM	MPH Hewes	GPH	MPG
Idle	3.3	0.0	0.0
1000	5.2	0.9	5.8
1500	7.0	1.7	4.1
2000	8.9	2.7	3.3
2500	15.2	3.4	4.5
3000	21.8	4.7	4.6
3500	25.7	6.0	4.3
4000	29.0	7.6	3.8
4500	32.5	9.3	3.5
5000	37.0	15.1	2.5
5500	39.6	18.0	2.2
WOT	41.6	18.8	2.2

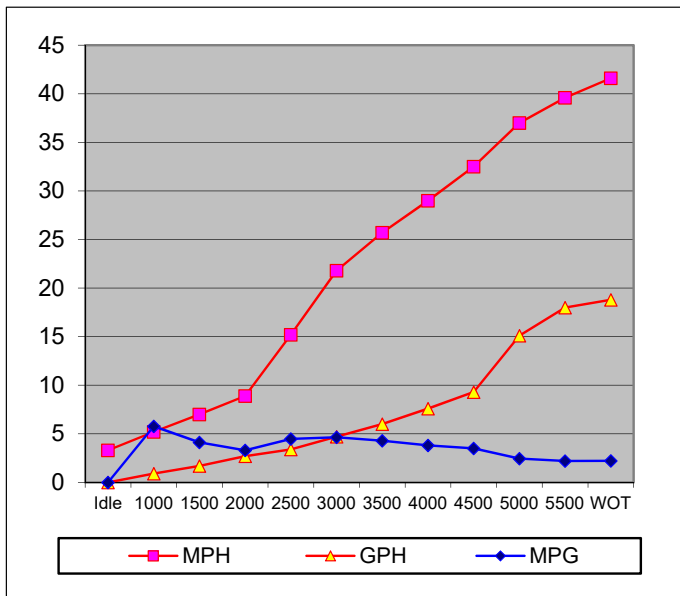

Time to plane: 4.2 Seconds Acceleration 0-20 MPH: 5.2 Seconds

Hewescraft® 220 Ocean Pro HT

Test Date 7/15/08

Length	24'5"
Beam	102"
Dry Weight (Boat only)	2,600 lbs.
Maximum HP	250
Fuel Capacity	85 gallons
Weight as Tested (approx.)	3,700 lbs.

Note: Test weight includes 20 gallons of fuel, 1 battery, safety & test Equipment

Honda BF200

Horsepower	200 HP
Displacement	3.5L
Dry Weight (engine)	599 lbs.
Gear Ratio	1.86
Mounting Height	#2

Propellers

Material / Blades	Aluminum / 3 blade
Series	Solas
Diameter / Pitch	15 ¼ x 15

Test Conditions

Number of People	4
Air / Water Temperature (Fahrenheit)	75° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 - 5 mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Honda reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 220 Ocean Pro HT



RPM	MPH Hewes	GPH	MPG
Idle	3.3	0.5	7.0
1000	4.5	0.9	5.0
1500	7.0	1.7	4.1
2000	8.9	2.4	3.7
2500	11.8	3.3	3.6
3000	17.9	5.1	3.5
3500	22.6	5.6	4.0
4000	27.8	7.4	3.8
4500	32.6	10.1	3.2
5000	36.8	15.2	2.4
5500	41.1	17.7	2.3
WOT	45.7	19.9	2.3

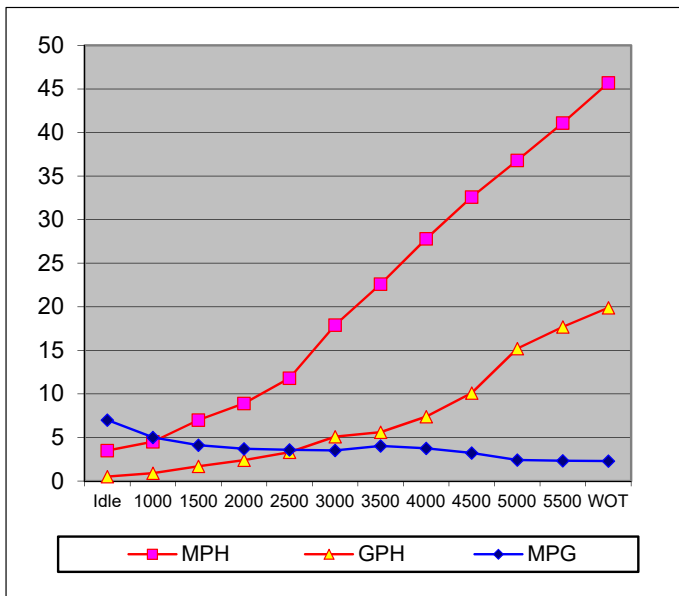

Time to plane: 4.3 Seconds Acceleration 0-20 MPH: 5.4 Seconds

Hewes Marine Company, Inc.

1445 N Hwy Colville, WA 99114

Hewescraft® 220 Ocean Pro HT

Test Date 2/12/09

Length	24'3"
Beam	102"
Dry Weight (Boat only)	2,600 lbs.
Maximum HP	250
Fuel Capacity	85 gallons
Weight as Tested (approx.)	3,949 lbs.

Note: Test weight includes 20 gallons of fuel, 1 battery, safety & test Equipment

Honda BF225

Horsepower	225 HP
Displacement	3.5L
Dry Weight (engine)	589 lbs.
Gear Ratio	1.86
Mounting Height	#2

Propellers

Material / Blades	SS / 3 Blade
Prop Manufacturer	Apollo
Diameter / Pitch	14 5/8 x 16

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	42° F
Elevation (in feet above sea level)	650 ft.
Wind Velocity	0 - 5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Honda reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

PH: 800-326-6594


www.hewescraft.com



Performance Bulletin – 220 Ocean Pro HT



RPM	MPH Hewes	GPH	MPG
1000	5	.7	7.1
1500	6	1.2	5
2000	7	2.2	3.2
2500	10	2.6	3.8
3000	14	4.0	3.5
3500	20	5.3	3.8
4000	25	7.3	3.4
4500	30	8.7	3.4
5000	34	12.1	2.8
5500	37	15.0	2.5
6000	43	21.7	2.0

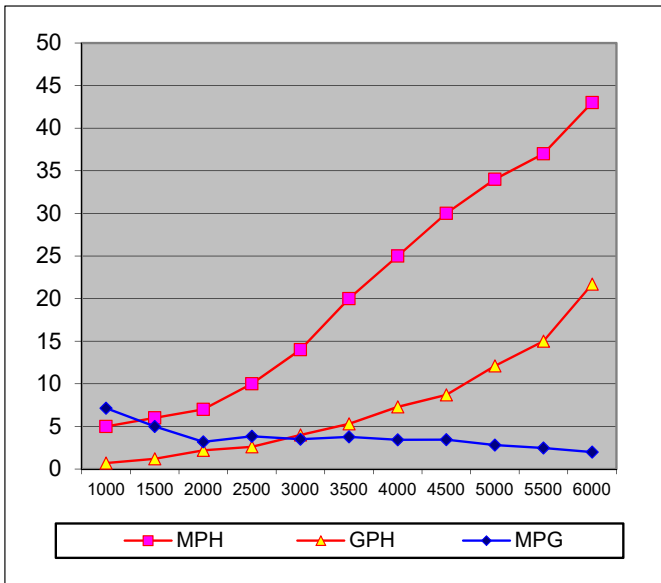

Time to plane: 4 Seconds Acceleration 0-20 MPH: 7 Seconds

Hewescraft® 220 Ocean Pro HT

Test Date 9/12/15

Length	24'5"
Beam	102"
Dry Weight (Boat only)	3200 lbs.
Maximum HP	250
Fuel Capacity	100 gallons
Weight as Tested (approximate)	N/A

Note: Test weight includes 20 gallons of fuel, 1 battery, safety & test Equipment

Honda BF250

Horsepower	250 HP
Displacement	3.5L
Dry Weight (engine)	589 lbs.
Gear Ratio	1.86
Mounting Height	#1

Propeller

Material / Blades	SS / 3 blade
Prop Manufacturer	Solas
Diameter / Pitc	15 ¾ x 15

Test Conditions

Number of People	4
Air / Water Temperature (Fahrenheit)	70° F
Elevation (in feet above sea level)	1,630 ft
Wind Velocity	2 mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Honda reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 220 Ocean Pro ET HT



RPM	MPH	GPH	MPG
1000	5.2	1	5.20
1500	7	1.7	4.12
2000	78.7	2.7	3.22
2500	12.6	4	3.15
3000	18.1	5.4	3.35
3500	23.5	7.3	3.22
4000	28.7	9.4	3.05
4500	33.5	12.4	2.70
5000	37.5	15.5	2.41
5500	42	20.8	2.01
6000 WOT	45.7	22.8	2.00

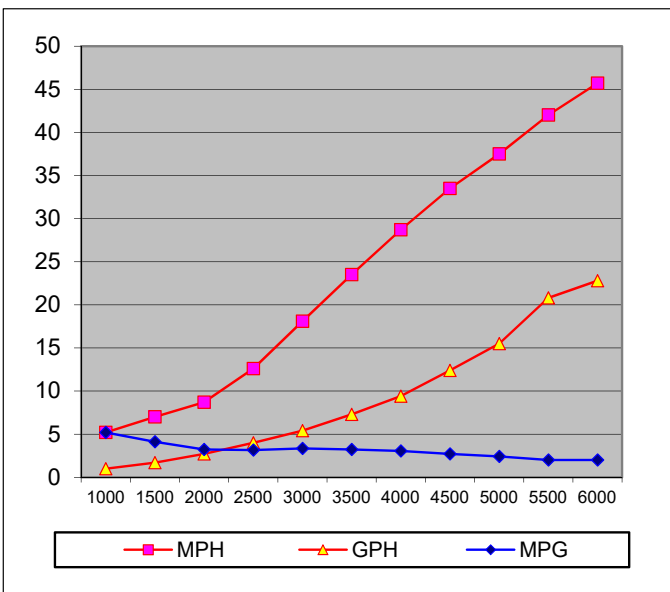

Time to plane: 3 Seconds Acceleration 0-20 MPH: 5 Seconds

Hewescraft® 220 Ocean Pro ET HT

Test Date 1/16/16

Length	24'3"
Beam	102"
Dry Weight (Boat only)	3200 lbs.
Maximum HP	250
Fuel Capacity (at testing)	100 gallons
Weight as Tested (approximate)	4500 lbs.

Note: Test weight includes 20 gallons of fuel, 1 battery, safety & test Equipment

Mercury 225 Verado

Horsepower	225 HP
Displacement	2.6L
Dry Weight (engine)	668 lbs.
Gear Ratio	1.85
Mounting Height	#1

Propellers

Material / Blades	SS / 3 blades
Series	Solas
Diameter / Pitch	14 x 17
Mercury Part #	N/A

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	45° F
Elevation (in feet above sea level)	N/A ft.
Wind Velocity	N/A mph




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Mercury reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 240 Ocean Pro ET



RPM	MPH	GPH	MPG
1000	6.0	1.3	4.62
1500	9.0	2.2	4.09
2000	11.0	3.4	3.24
2500	16.0	4.8	3.33
3000	22.0	6.1	3.61
3500	27.0	7.8	3.46
4000	31.0	10.3	3.01
4500	34.0	13.1	2.60
5000	38.0	14.9	2.55
5500	41.0	20.1	2.04
5900	46.0	22.7	2.03

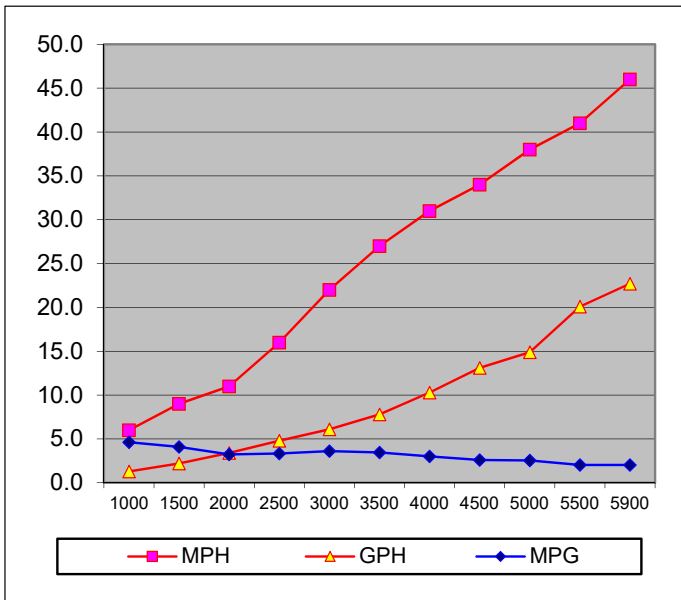

Time to plane: 3.55 Seconds Acceleration 0-30 MPH: 5.79 Seconds

Hewescraft® 240 Ocean Pro ET

Test Date 9/17/16

Length	26'8"
Beam	102"
Dry Weight (Boat only)	3,100 lbs.
Maximum HP	300
Fuel Capacity	100 gallons
Weight as tested (Approximate)	4,951 lbs.

Note: Test weight includes full tank of fuel, 1 battery, Yamaha T9.9 auxiliary outboard, safety & test Equipment

VF250XA MAX SHO

Horsepower	250 HP
Induction	EFI
Displacement	4.2 L
Dry Weight (engine)	555 lbs.
Gear Ratio	1.75
Mounting Height	#2 even w/ bottom of boat

Propellers

Material / Blades	Polished Stainless Steel / 3 blade
Series	Saltwater Series II
Diameter / Pitch	15 3/4 x 15
Yamaha Part #	6CE-45976-00-00

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	90 / 60° F
Elevation (in feet above sea level)	1,270 ft.
Wind Velocity	0 - 5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.